



# TAIWAN MOTORS

## 25GA SERIES



### Type 25GA370

Model No.	Voltage	NO LOAD		AT MAXIMUM EFFEICIENCY				STALL		gear Ratio
		SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT	
	V	rpm	mA	rpm	mA	kg. cm	W	kg. cm	mA	
370-456	12	12	80	10	200	5.0	---	>30	0.9	1:456
370-125	12	45	80	37	200	2.0	---	11	0.9	1:125
370-21	12	430	120	370	400	0.5	---	3.0	1.8	1:21
370-15.5	12	600	150	440	600	0.5	---	2.0	1.8	1:15.5
370-15	12	800	180	640	600	0.5	---	2.0	3.5	1:15
370-217	6.0	45	300	39	500	2.0	---	>15	2.8	1:217
370-46	6.0	200	300	170	500	0.6	---	3.0	2.8	1:46
370-31	6.0	330	300	270	500	0.4	---	2.6	2.8	1:31
370-21	6.0	430	300	370	460	0.2	---	2.0	2.8	1:21
370-21	6.0	500	300	400	500	0.2	---	2.0	2.8	1:21
370-16	6.0	600	280	510	500	0.1	---	1.6	2.8	1:16
370-16	6.0	600	280	510	500	0.1	---	1.6	2.8	1:16
370-16	6.0	600	280	510	500	0.1	---	1.6	2.8	1:16
370-12.3	6.0	800	300	480	450	0.15	---	1.5	2.8	1:12.3
370-10	6.0	1000	30	830	450	0.1	---	1.2	2.8	1:100

## DIMENSION

DIMENSION (UNIT : mm)

DIRECTION OF ROTATION

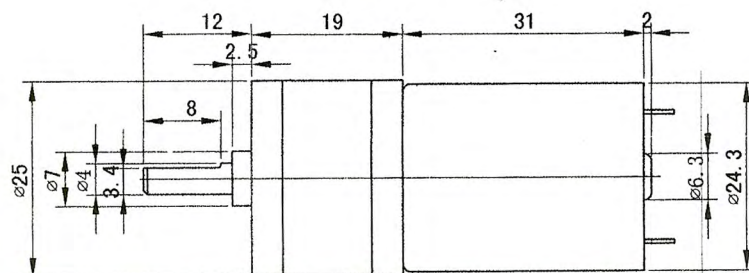

● To customize motors, please contact with us or our agent.